



Laboratory Refrigerators

*Designed and manufactured in Australia by
Thermoline*

ABN: 80 000 859 129

Head Office: 10-12 Ross Place
Wetherill Park NSW 2164 Australia

Phone: +61 2 9604 3911

Email: hello@thermoline.com.au

Web: www.thermoline.com.au

Proudly Family- Owned and Operated

Today, we remain a proud second-
generation family business



A family
owned
Australian
business



Laboratory Refrigerators

Designed and Manufactured by **Thermoline**

The Thermoline Laboratory Refrigerator range is designed and manufactured to provide safe and precise temperature conditions for the items stored inside. Designed to operate between +4°C to +10°C with alarms set at 3°C above and below the setpoint, the Thermoline Laboratory Refrigerators offer an industry standard in cold laboratory storage. Additionally the range is registered as Medical Devices, Class I and are listed in the ARTG, 299160.

- **Models available:**

Thermoline has six laboratory refrigerators available, with the 520L to 1500L models all designed and manufactured in Australia. These models are economical and simple to use making them an ideal choice for all products and samples requiring reliable refrigerated storage.



- **Maximum & Minimum Temperature Logging:**

The Dixell XR70 has a built-in temperature log that records the minimum and maximum temperatures. This helps to monitor temperature fluctuations for reporting purposes.



- **Fan Forced air circulation:**

All lab fridges feature fan-forced air circulation. This results in a fantastic temperature spatial uniformity and quick recovery times after door openings.



- **Stainless Steel Interior:**

Stainless steel is durable, easy to clean and resistant to corrosion, making it the perfect choice for cool environments. Stainless steel is used in all premium models (520-1500L) to ensure the most corrosive resistant liner possible. The remaining 145L and 200L fridges have an attractive white powder coated finish.

- **Frost Free Operation:**


All models feature frost-free operation to prevent ice accumulation, maintaining stable temperature conditions and reducing the need for manual defrosting.





Laboratory Refrigerators

Designed and Manufactured by **Thermoline**

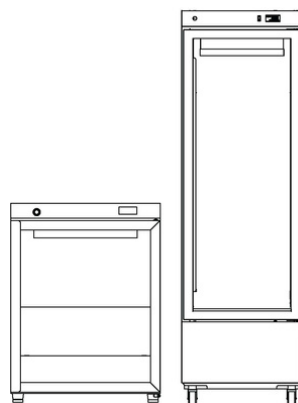

Dimensions

External

WxDxH (mm)

TLR-145-1-(GD/SD)

600x600x800

TLR-200-1-(GD/SD)

560x580x1590

Internal

WxDxH (mm)

530x430x620

440x420x1080

Spacing

Front (mm)

TLR-145

600

TLR-200


560

Back (mm)

100

Sides (mm)

100

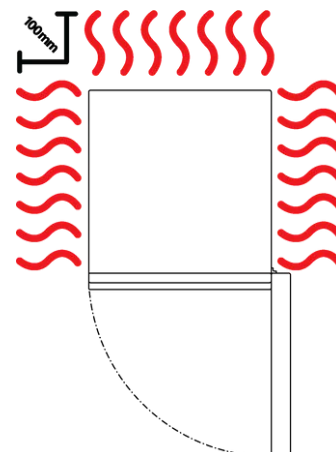


See our Pharmacy Refrigerator Range.

Designed specifically for vaccine storage at temperatures between +2°C and +8°C

Laboratory Refrigerators

Designed and Manufactured by **Thermoline**

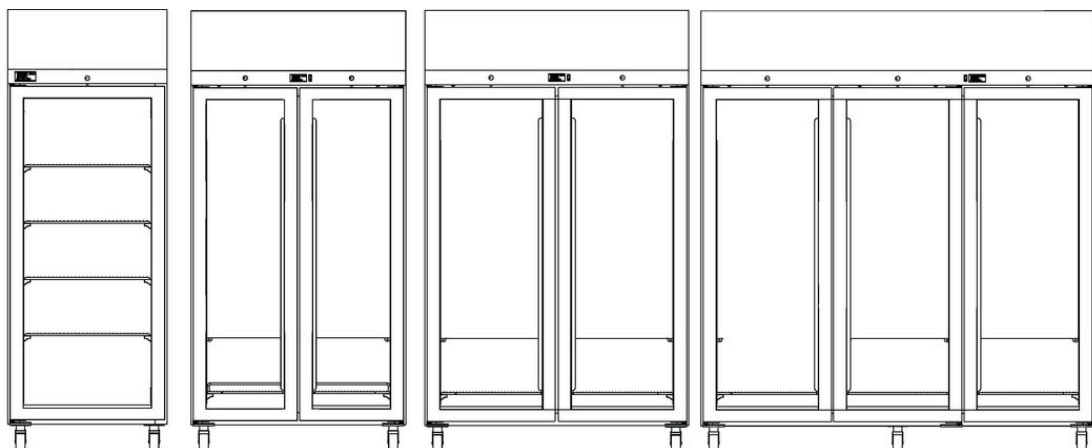

Dimensions

External

WxDxH(mm)

TLR-520-1-(GD/SD)

TLR-750-2-(GD/SD)

TLR-950-2-(GD/SD)

TLR-1500-3-(GD/SD)

740x740x2010

1010x740x2010

1230x740x2010

1830x740x2010

Internal

WxDxH(mm)

590x530x1430

850x530x1430

1080x530x1430

1680x530x1430

Clearance

Front (mm)

TLR-520

TLR-750

TLR-950

TLR-1500

740

500

610


610

Back (mm)

100

Sides (mm)

100

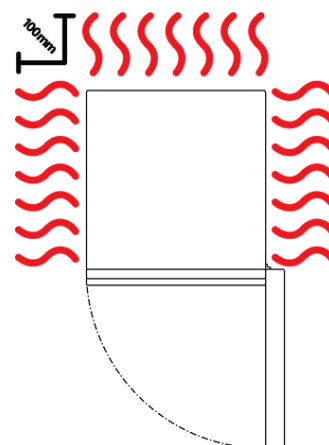

Laboratory Refrigerators

Designed and Manufactured by **Thermoline**

Technical Specifications

	TLR-145	TLR-200
Temperature Range	+4°C to +10°C	
Temperature Display Stability	+/- 0.5°C	
Temperature Uniformity	+/- 2.0°C	
Electrical	0.9A/230V	2.5A/230V
Nominal Capacity	145L	200L
Weight	65kg	90kg
Heat Output (Watts)	240	300
Noise Level @ 1 metre (dbA)	40	53
Power Consumption (kWh/24)	1.5	3.6
Refrigerant Type	R134a	

	TLR-520	TLR-750	TLR-950	TLR-1500
Temperature Range	+4°C to +10°C			
Temperature Display Stability	+/- 0.5°C			
Temperature Uniformity	+/- 2.0°C	+/- 2.5°C		+/- 3.0°C
Electrical	2.8A/230V	3.8A/230V	3.8A/230V	5.4A/230V
Nominal Capacity	520L	750L	950L	1500L
Weight	160kg	190kg	220kg	290kg
Heat Output (Watts)	490	850	850	1050
Noise Level @ 1 metre (dbA)	64	67	67	67
Power Consumption (kWh/24)	4.4	6.0	6.0	8.5
Refrigerant Type	R134a			

Laboratory Refrigerators

Designed and Manufactured by **Thermoline**

Features

Shelves (max @100mm spacing)

TLR-145

TLR-200

TLR-520

TLR-750/950

TLR-1500

4 (max 4)

5 (max 6)

4 (max 11)

4 levels
(max 11)

4 levels
(max 11)

Castors

X

Rear Rollers

✓

✓

✓

Porthole Diameter

13mm

Internal Fan

✓

✓

✓

✓

✓

Door Locks

✓

✓

✓

✓

✓

BMS Plug

✓

✓

✓

✓

✓

Ecofoam Insulation

✓

✓

✓

✓

✓

Safety

Over Current Protection

✓

✓

✓

✓

✓

Over Temperature Safety

✓

✓

✓

✓

✓

Options

Glass or Solid Doors

Nomenclature designations: Glass Door (GD), Solid Door (SD)

LTPC: Low Temp Cut Out

Low Temperature Protection Cut Out. This option is designed to prevent products inside the fridge from freezing (extremely important for the storage of vaccines).

Chart Recorder

7 Day Chart Recorder with Battery Backup
145L/200L: Flying Lead, 520L-1500L: Built into top panel

Additional Port Holes

Additional 13mm port holes or 50mm port holes can be added to the side walls

Stainless Exterior

X

X

✓

✓

✓





We are proudly Australian owned

We will continue to invest in Australian manufacturing.

